

PG with Stabilizer and Mini-Seal

The SRU25 fully stainless steel pressure gauge is equipped with an inbuilt silicon jelly stabilizer movement for mechanical dampening against pressure spikes, vibrations, etc.

- stable and reliable reading by a specially designed movement part
- no oil leakage, no blurry display, no oil refilling
- no risk of contamination of process media


The SRU25X lightweight, stainless steel pressure gauge with heavy duty mini diaphragm seal is the ideal choice for

- corrosive, viscous, sedimentous process media
- with a high temperature or high pressure



The diaphragm is AISI 316L welded to the body to ensure separation of the filling fluid from the process medium.

Advantages:

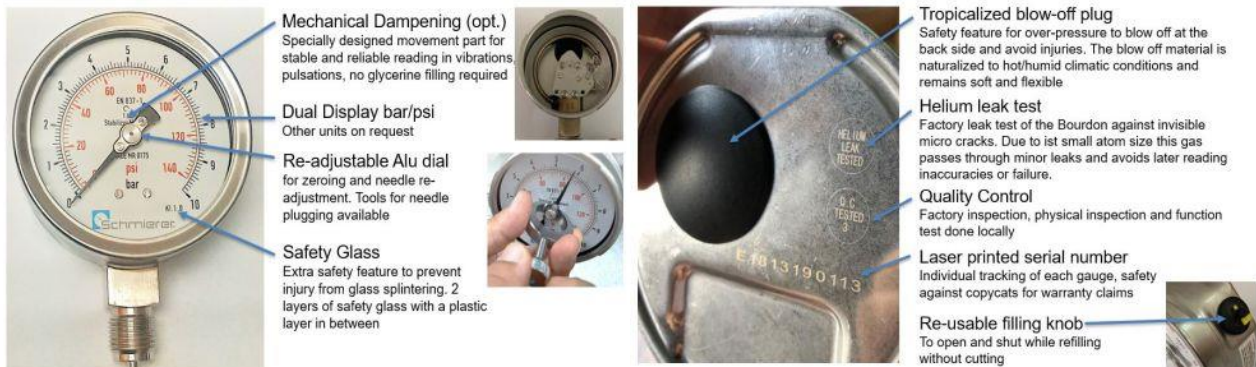

Features:

Gauge:

Rugged fully stainless steel construction

Seamless tube bourdon, socket SS316L, NACE, TIG welding, Helium leak tested

Shatterproof 2 layer safety glass, dual display bar/psi

Case, Bezel, Movement SS304, NBR nitrile rubber gasket, IP 66

Pressure range from -1 to 15 bar, 0 – 100 bar (opt. up to 1600 bar)

Temperature compensated Neopren Rubber Blow Out Disc

Dual display bar/psi

Zero re-adjustable pointer on white aluminium dial

Miniseal:

½" -1 bar to 400 bar, ¼" -1 bar to 200 bar

up to 300°C process temperature

[more details](#)

Schmierer SEA SDN. BHD. (Company No. 1125610-M)
No 74 Jalan Keluli AN7/AN, Pusat Perniagaan, Bukit Raja Sek 7
40000 Shah Alam, Selangor DE, Malaysia
Tel +603-33448819 Faxl +603-33438819
SchmiererSEA.com - info@SchmiererSEA.com

Authorized Distributor / Dealer / OEM / Reseller

